



UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	L0532/7012
	First Named Inventor or Application Identifier	
	L0532/7012	
	Express Mail Label No.	EL018096786US
	Date of Deposit	June 30, 2000



APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents	ADDRESS TO: Box Patent Application Commissioner for Patents Washington, DC 20231
1. <input type="checkbox"/> Fee Transmittal Form (Submit an original, and a duplicate for fee processing) 2. <input checked="" type="checkbox"/> Specification [Total pages 29] 19 - pages description 1 - pages abstract 9 - pages claims 84 - Total claims 3. <input checked="" type="checkbox"/> Drawing(s) (35 USC 113) [Total sheets 6] <input checked="" type="checkbox"/> Informal <input type="checkbox"/> Formal [Total drawings 6] 4. <input type="checkbox"/> Oath or Declaration [Total pages] a. <input type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed) [Note Box 5 below] i. <input type="checkbox"/> <u>DELETION OF INVENTOR(S)</u> Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b). 5. <input type="checkbox"/> Incorporation by Reference (usable if Box 4b is checked) The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.	6. <input type="checkbox"/> Microfiche Computer Program (Appendix) 7. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies ACCOMPANYING APPLICATION PARTS 8. <input type="checkbox"/> Assignment Papers/cover sheet & documents(s) 9. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee) <input type="checkbox"/> Power of Attorney 10. <input type="checkbox"/> English Translation of Document (if applicable) 11. <input type="checkbox"/> Information Disclosure Statement PTO-1449 <input type="checkbox"/> Copies of IDS Citations 12. <input type="checkbox"/> Preliminary Amendment 13. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 14. <input type="checkbox"/> Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired 15. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. Other:	

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:


- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: ??
- ☐ Cancel in this application original claims of the prior application before calculating the filing fee.
- ☐ Amend the specification by inserting before the first line the sentence:
- This application is a ☐ continuation ☐ divisional of application serial no., filed, entitled , and now .

18. CORRESPONDENCE ADDRESS

Correspondence address below

ATTORNEY'S NAME	Neil P. Ferraro, Reg. No. 39,188 and Stephen R. Finch, Reg. No. 42,534				
NAME	Wolf, Greenfield & Sacks, P.C.				
ADDRESS	600 Atlantic Avenue				
CITY	Boston	STATE	MA	ZIP	02210
COUNTRY	USA	TELEPHONE	(617) 720-3500	FAX	(617) 720-2441

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME	Stephen R. Finch, Reg. No. 42,534
SIGNATURE	
DATE	June 30, 2000

OPTICAL DATA COPY PROTECTION

FIELD OF THE INVENTION

The present invention is directed to copy protection of optical recording media and
5 specifically to the protection of data recorded on optical disks.

BACKGROUND OF THE INVENTION

Optically readable digital storage media, such as music and software CD's and video
DVD's, provide inexpensive ways to share and disseminate digital information, making such
10 media the media of choice among both producers and consumers. This is clearly evident as
CD's have nearly replaced cassette tapes and floppy disks in the music and software industries
and DVD's have made significant inroads in replacing video cassette tapes in the home video
industry. Because of the high demand for such optical media and because of the ease and low
cost of reproduction, counterfeiting has become prevalent.

15 A variety of copy protection techniques and devices have been developed to limit the
unauthorized copying of optical media. Among these techniques are analog Colorstripe
Protection System (CPS), CGMS, Content Scrambling System (CSS) and Digital Copy
Protection System (DCPS).

Analog CPS (also known as Macrovision) provides a method for protecting videotapes
20 as well as DVDs. The implementation of Analog CPS, however, may require the installation of
circuitry in every player used to read the media. Typically, when a disk or tape is "Macrovision
Protected," the electronic circuit sends a colorburst signal to the composite video and s-video
outputs of the player resulting in imperfect copies. The use of Macrovision may also adversely
affect normal playback quality.

25 With CGMS, the media may contain information dictating whether or not the contents of
the media can be copied. The device that is being used to copy the media must be equipped to
recognize the CGMS signal and also must respect the signal in order to prevent copying.

The Content Scrambling System (CSS) may provide an encryption technique that is
designed to prevent direct, bit-to-bit copying. Each disk player that incorporates CSS is
30 provided with one of four hundred keys that allow the player to read the data on the media but
prevents the copying of the keys needed to decrypt the data. However, the CSS algorithm has

been broken and has been disseminated over the Internet, allowing unscrupulous copyists to produce copies of encrypted disks.

The Digital Copy Protection System (DCPS) provides a method whereby devices that are capable of copying digital media may only copy disks that are marked as copyable. Thus, the disk itself may be designated as uncopyable, however, for the system to be useful, the copying device must include the software that respects the "no copy" designation.

Each of these copy protection techniques, and others that may be available, may make it more difficult to copy material from optical media, and may deter the casual copyist. However, these techniques may be easily circumvented by the unscrupulous copyist who is intent on making digital copies of a disk.

SUMMARY OF THE INVENTION

In one illustrative embodiment, a method of authenticating optical storage media is disclosed. A locus on an optical storage medium is read and a first set of data is received from the locus. The locus is then re-read and a second set of data is read from the locus, the second set of data being different from the first set of data.

In another illustrative embodiment an optical disk is disclosed. The optical disk includes a substrate and a data track disposed on the substrate. A light-sensitive compound is disposed on at least a portion of the disk and cooperates with the data track to alter the data upon excitation with a suitable stimulus.

In another illustrative embodiment, a method of treating an optical storage medium is disclosed. Data is recorded onto the optical storage medium and a light-sensitive compound is applied to the medium. At least a portion of the light-sensitive compound is selectively activated.

In another illustrative embodiment an optical recording medium is disclosed. The optical recording medium includes stored data and means for altering, upon re-reading, data that is read from a locus on the medium.

In another illustrative embodiment, an optical recording medium is disclosed. The medium include a data track including readable data. At least a portion of the output is altered predictably upon re-reading.

In another illustrative embodiment, a method of authenticating an optical storage medium is disclosed. The medium has a first plane including data and a second plane having a light-sensitive compound. The method includes reading data from the first plane, exciting the light-sensitive compound in a second plane and reading data from the second plane.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described, by way of example, with reference to the accompanying drawings, in which:

10 Figure 1 is a schematic illustration of one type of optical reader that may be used with an embodiment of the present invention.

Figure 2 is an enlarged cross-sectional illustration of an optically readable medium including recorded data.

Figure 3 is a cross-sectional illustration of an optically readable medium including recorded data and a representation of the binary data that is read when the medium is sampled.

15 Figure 4 is a cross-sectional illustration of an optically readable medium including recorded data and a representation of the binary data that is detected when the medium is sampled.

Figure 5 is a cross-sectional illustration of the optical medium of Figure 4 including a representation of the binary data that is read when the medium is re-read.

20 Figure 6 is a cross-sectional illustration of an optical medium including a representation of binary data that is detected when the medium is re-read.

DETAILED DESCRIPTION

25 The present invention is directed to protecting optically recorded media from being reproduced or copied. The invention provides for the altering of the digital data output from a section of the media in a manner that allows the data to be read without requiring alterations to the hardware, firmware or software used in optical media readers while preventing reproduction of the medium. This may be accomplished by employing a light-sensitive compound on the disk that reacts upon excitation from the light within a conventional optical reader in a manner to
30 selectively alter data read by the reader.

“Optical Storage Media” refers to media capable of storing digital data that may be read by an optical reader.

“Light Sensitive Compound” refers to a compound that responds to irradiation with light.

“Light Absorptive Compound” refers to a compound that absorbs light in response to
5 excitation.

“Light Emissive Compound” refers to a compound that emits light in response to excitation.

“Re-read” refers to re-sampling a portion of the data recorded on an optical medium after it has been initially read.

10 “Fluorescent Compound” refers to a compound that radiates light in response to excitation by electromagnetic radiation.

“Phosphorescent Compound” refers to a compound that emits light in response to excitation by electromagnetic radiation wherein the emission is delayed from the time of excitation.

15 “Recording Dye” refers to a chemical compound that may be used with an optical recording medium to record digital data on the medium.

“Security Dye” refers to a compound that may provide or alter a signal to protect the data on an optical storage medium.

20 “Active Light-Sensitive Compound” refers to an active form of a light-sensitive compound, as some light-sensitive compounds may exist in both active and inactive states.

“Active Security Dye” refers to the active form of a security dye, as some security dyes may exist in both active and inactive states.

“Activate” refers to transforming a compound from an inactive to an active state.

25 “Non-Destructive Security Dye” refers to a security dye that does not render optical media permanently unreadable.

“Reader” refers to any device capable of detecting data that has been recorded on an optical medium.

Copy protection schemes that are available today typically require changes to the hardware that is used to read, and potentially copy, the media, or these schemes require the use
30 of data encryption that may be broken by those who are determined to do so. The present invention may provide a technique that requires neither encryption nor hardware changes but

may incorporate a physical change in the media itself. The invention may provide for a first data set when the media is sampled by a reader and then may provide for an alternative data set when the media is re-read by the reader.

In one aspect of the invention, a specific locus on an optical storage medium is read, and the same locus is re-read again. Upon re-reading, the data that is read from the locus is different from that of the initial reading. This may be accomplished by incorporating a compound into or onto the media. Upon exposure to light of a wavelength, the compound may provide no immediate response. However, upon re-reading by the reader, which occurs later in time, the compound emits light at an intensity and wavelength sufficient to alter the data that is read from the media. In one aspect, as will become apparent, the data is blocked upon re-reading.

In another aspect, an optical disk that includes a substrate with a data track disposed on the substrate includes a non-destructive light-sensitive compound that has been disposed on at least a portion of the disk.

In another aspect of the invention, a light-sensitive compound is applied to an optical storage medium on which data has been or will be recorded. At least one portion of the light-sensitive compound may then be selectively activated so that the light-sensitive compound provides delayed light emission or absorption in response to excitation with a light source.

In another aspect, a method of authenticating optical storage media is provided wherein data is sampled from a first track of an optical medium with the first track being located in a first plane, and at the same time, exciting a light-sensitive compound that resides in a different, second plane on the optical medium. The output produced from the light-sensitive compound in the second plane is then sampled from the optical medium.

In another aspect, a data track containing readable data is re-read and at least a portion of the data is predictably altered upon re-reading.

The invention may be useable with conventional optical media. For example, a DVD disk incorporating the invention may provide protection when being read by an "off the shelf" DVD player. In addition, the invention may be incorporated into mass production techniques that are currently used to produce, for example, CDs and DVDs, and may not require changes to production line plant and equipment. Figure 1 provides a schematic representation of a conventional CD reader that may be used in conjunction with the invention.

Referring to figure 1, a light source 10, typically a laser diode, emits light of a specific wavelength, for example, 780 nm. The light passes through defraction grating 20 where it splits into a primary beam 30 and secondary beams 31 and 32. Each of these beams then passes through polarizing beam splitter 40 which polarizes them by 90 degrees. Each of these beams
5 then passes through collimating lens 50 and then through $\frac{1}{4}$ waveplate 60. $\frac{1}{4}$ waveplate 60 converts the light into circularly polarized light. The polarized, collimated light beams then pass through objective lens 70 and are focused onto optical disk 80, such as a CD, that is spinning at a variable rate to provide for constant velocity of the track, regardless of the laser's position on the disk. Any light that is reflected back from the disk (see description below) passes back
10 through the objective lens 70 and through the $\frac{1}{4}$ waveplate 60 which further polarizes the light so that it is now polarized perpendicularly in comparison to the polarization of the first light beam prior to its initial passage through the $\frac{1}{4}$ waveplate 60. The reflected beam then passes back through the collimating lens 50 and because of its change in polarization is now reflected off of beam splitter 40 rather than passing through beam splitter 40. The reflected beam is then
15 focused through concave lens 90 and further through cylindrical lens 100, which aids in the tracking of the light beam along the data track. Finally, the reflected light beam impinges upon photodetector 110 where the signal can be detected and processed.

Although one type of optical reader is described, the present invention is not limited in this respect and other suitable optical readers may be employed in conjunction with the
20 invention. The above description, therefore, is merely illustrative of a typical optical reader. Those skilled in the art will recognize various alternatives for an optical detector, whether embodying some or all of the elements described above, that may be employed with the present invention.

An enlarged view of the CD is illustrated in figure 2, which shows a cross-sectional view
25 (not to scale) of a track on the CD. The CD substrate 210 is typically made from a polymer such as polycarbonate, however, other suitable materials may be used. Data is recorded on the CD by forming a series of pits 220 and lands 230 in the substrate of the disk. Pits and lands may be formed using any suitable technique including injection molding of the features themselves or, alternatively, using a recording compound and a writing laser. If a recording compound is used,
30 data may be written to the medium using a laser that is designed to heat the recording compound to a point where adjacent polymer material is deformed to form the pits and lands. Typically,

for an audio CD, each pit is about $\frac{1}{2}$ micron wide and anywhere from about 0.8 to 3.5 microns long. However, it should be appreciated that the present invention is not limited in this respect and other methods of recording and /or sharing data on the CD may be employed.

The pits and lands are typically coated with a reflective layer 240, of, for example, aluminum, which is then coated by a protective layer 235, typically acrylic. If desired, the acrylic layer may be covered by a label, 250. In operation, the light beam 30, typically at a wavelength of 780 nm, passes through the surface of the polycarbonate substrate 210 where it becomes more sharply focused due to the high refractive index of the polycarbonate. The high refractive index may also alter the wavelength of the light, for example, from 780 nm (infrared) to about 500 nm (green). The beam is focused on the reflective surface 240 where it is highly reflected by the lands 230, and less directly reflected, or scattered, by pits 220. The pits are typically formed at a height of about $\frac{1}{4}$ of the wavelength of the light passing through the polycarbonate. Thus, light that is reflected from a land travels about $\frac{1}{2}$ wavelength farther than light that is reflected from a pit, resulting in light reflected from a pit being out of phase with light reflected from a land. The two waves will therefore cancel each other, resulting in no light being reflected back to the detector.

Figure 3 illustrates schematically one method of transforming a light beam reflected off of a CD into digital information. By setting a threshold level of reflectance, transitions between pits and lands may be detected at the point where the signal generated from the reflectance crosses a threshold level. Whenever the threshold level is crossed, i.e., a transition between a pit and a land or between a land and a pit is detected, a binary code of 1 is read. At all other intervals, a 0 is detected. Thus, both pits and lands may actually represent a series of 0's; it is the transition that represents a 1. In this manner, binary information may be read from the disk.

As may be apparent to those skilled in the art, the data on a disk may be transformed using an eight to fourteen modulation (EFM) convention. EFM provides a process whereby 1's need not be written consecutively, as this would require extremely small pits or lands with frequent transitions that might result in numerous errors. In addition, EFM specifies that at least two and no more than 10 0's appear between any pair of 1's. In addition, three merging bits are placed between each fourteen bit set to help further minimize errors. After detection, each fourteen bit piece of data is converted into an eight bit binary word. The fourteen bit process that is physically recorded onto the optical medium may contain no more than ten and no fewer

than two 0's between each pair of 1's, but can represent any eight bit word. Although an EFM protocol has been described, the present invention is not limited in this respect and other protocols may be implemented. In addition, no such protocol need be employed. Thus, the above-described EFM is merely illustrative of conventional manipulation of data combined on a CD.

Figure 3 shows how the raw bit data may be read from a CD track as it passes under the light source. For example, referring again to figure 3, transition points may be seen at points A, B, C and D. Each of these points corresponds to a transition in the medium between a pit and a land or a land and a pit. At each of these transition points, the signal generated from the reflected laser crosses the threshold and a 1 is read at each of these transition points. At non-transition points, a series of 0's is read.

The method and apparatus of the present invention may provide producers and distributors of digital data with a technique that aids in the prevention of reproducing, for example, software, audio and video optical media. Some of the formats with which the invention may be useful include, but are not limited to, CD Audio, CD-ROM, CD-G, CD-i, CD-MO, CD-R, CD-RW, DVD, DVD-5, DVD-9, DVD-10, DVD-18 and DVD-ROM.

In one embodiment, the invention may provide copy protection by changing the output from an optical medium upon re-reading of a locus on the medium. The location that is re-read may be of any size or type and may include, for example, a single bit, a byte, a frame, a block, a sector or any other selection that is recorded or will be recorded on the medium. In addition, any number of different locations may provide a change in output upon re-reading.

Many conventional optical media readers such as CD and DVD readers may be capable of oversampling a particular locus on the optical medium to reduce the likelihood of playback errors. Oversampling may occur immediately after an initial sampling or may be delayed. Software written on the optical medium may direct the reader to resample a particular set of data one or more times, or a reader may be pre-programmed to resample the media a number of times without any additional input from software on the media. For example, one way in that a CD player may resample data is by oversampling an audio disk several times in order to reduce errors and ensure adequate reproduction. A data set on a CD or DVD may be oversampled any number of times, for example, 4X or 8X, and the readings may be compared so that errors may

be eliminated or minimized. In one embodiment, the invention may incorporate such oversampling.

The output at a particular locus may be changed by including an additional compound in the medium. For example, on an initial reading, the compound may have little or no effect on passing light and therefore underlying data is read and interpreted as originally recorded.

However the passing light may influence the compound and change its properties so that upon re-reading, the signal that is received by the detector is different from that which was received upon initial sampling. The compound may be a light sensitive compound. For instance, the added compound in the medium may become reflective within a timeframe that provides for reflectance of the light beam upon resampling. Alternatively, a compound may provide for delayed emission or absorbance of light and therefore may be used to alter the signal either positively or negatively.

In one example, data recorded on an optical medium instructs the optical reader to re-read a particular locus on the medium. For example, the reader may be instructed to re-read a sector on the disk. The medium may contain areas that include a light sensitive compound, such as a fluorescent or phosphorescent compound. This light-sensitive compound may be chosen so that it is excited by a wavelength that is typically used by a reader on which the particular medium is played. For example, in the case of a CD reader, the light-sensitive compound may be chosen to absorb at about 780 nm. The light-sensitive compound may be placed anywhere in or on the medium and in one aspect may be strategically placed in the light path between the data recorded on the optical medium and the detector that is used to read the reflected light off of the medium. If, upon re-reading, a reading from the light-sensitive compound is detected, access to the data on the media may be provided. If the response upon re-reading is the same as upon initial sampling, indicating absence of the light-sensitive compound, further access may be denied.

Protection may be also provided by using a light-sensitive compound to record data at a particular locus required for the optical media to be operable. The light-sensitive compound may be placed in a different plane in the media, so that in order to be optimally read, the focal length of the optical system should be adjusted. Software included on the disk may direct the optical reader to alter its focal length appropriately, however, when an attempt is made to

reproduce the media, the copyist may be unable to reproduce the required data on media that does not include properly placed light-sensitive compound.

The light-sensitive compound may be placed in the medium as close to the recorded data as possible. This may provide, for example, a more precise focusing of the light beam in the area of the light-sensitive compound as the substrate material of which the medium is composed may serve as a lens to further concentrate the light beam at the point where the data has been recorded. Thus, if the light beam focuses on the appropriate plane in which the recorded data lies, it may not be fully focused on the light-sensitive compound that lies in a plane that is a distance from the recorded data. To minimize this difference in focal length, the light-sensitive compound layer may be placed directly over the recorded data. Upon a first pass of the light beam over the locus of the medium containing the light-sensitive compound, the compound may absorb some of the light, however, some of the light may pass through the compound striking the recorded data on a track in the medium, and reflecting back up through the light-sensitive compound to a detector where the data may be read, as it would be in the absence of the light-sensitive compound. However, if the reader has been instructed to re-read this particular locus, the reader will return to the same area on the medium in order to re-read the same set of data. By this time however, the light-sensitive compound may be emitting or reflecting or absorbing at a wavelength detected by the reader, and the signal produced from the detector may differ from that produced upon initial sampling, as areas that were initially of low reflectance, e.g., pits in the recording medium, are now read as reflectant due to the emission from the light-sensitive compound. If the emission from the light-sensitive compound is sufficient to provide a signal above a threshold, the data output will be varied from that which was originally read upon initial sampling. Thus, at the same point on the track, the recorded data may be read differently, though predictably, depending on whether the data is being initially read or re-read.

Protection may also be implemented by changing the wavelength of light from a reader. For example, the recorded data on the media may include instructions for the reader to use a different light source having a different wavelength to sample a particular locus on the medium. If the proper light-sensitive compound is present at the proper location, it will provide a detectable signal in response to being irradiated with light of the different wavelength. In turn, this may allow for continued access to the disk. If there is no response at the different wavelength, then access may be denied.

In another embodiment, delayed fluorescent compounds or phosphorescent compounds, emitting at a detectable wavelength after a specific amount of time, may be used in combination with an instruction set recorded on the medium that instructs the reader to re-read a specific locus on the medium after a time delay approximately equal to the amount of time required for the light-sensitive compound to fluoresce. For example, if a light-sensitive compound exhibits a peak fluorescence 1 millisecond after excitation by the light source, the medium may include instructions to direct the reader to re-read the particular area of the medium after a 1 millisecond time period. If, at the 1 millisecond time period, the expected fluorescence signal is detected, the reader is instructed to continue reading the recorded data off of the medium. If the expected fluorescence is not detected, access to the data on the disk may be denied. In this manner, a medium that does not include the proper compound in the proper location may not provide usable data to someone trying to access the data on the medium. Therefore, if an attempt is made to copy the optical medium, for example, by bit to bit copying, much of the data that is recorded on the medium may be successfully transferred, however the light-sensitive compound may not be copied as it may only be activated upon re-reading and in a typical bit-to-bit copying utility, bits are systematically copied as they are read. Thus, the copy will be inoperable.

Furthermore, if the light-sensitive compound is, in fact, detected during the copying procedure, it may not be possible to reproduce the signal provided by the light-sensitive compound at the same location on the optical medium that holds the originally recorded data, as a single locus on a track cannot simultaneously hold two different data sets. Therefore, when an attempt is made to operate a copy of the medium, the reader will be instructed to initially sample a specific locus on the medium and then re-read the locus looking for a different response. The unauthorized copy, however, may be able to provide only one of the two required responses as the copying system may be capable only of writing a single data set to the specific locus on the medium. Even if the data represented by the light-sensitive compound is copied, it may not be copied to the correct location and thus the copy may remain inoperable.

In other embodiments, any combination of sampling and re-reading of one or more areas of the medium may be employed. For example, the reader may be directed to resample a location on the medium and then wait a sufficient time for fluorescence to degrade to

nondetectable levels and then take a sampling of the location and detect the signal received from the underlying data.

In another embodiment, the reader itself may be programmed or designed to resample and analyze specific areas on an optical medium prior to proceeding with reading the medium.

- 5 In this manner, among others, it may be possible to copy protect the optically readable medium without including reading instructions on the medium itself.

- In addition to using fluorescent light-sensitive compounds, other light-sensitive compounds, for example, dyes, pigments, phosphorescent compounds and light absorptive compounds may also be employed. For example, light absorptive compounds may be used to
10 selectively absorb light that may be emitted by a reader or reflected off of particular areas of the medium. In this manner, the invention may allow a signal from a specific locus on a medium to be altered from one giving a reading above a threshold to one that reads below a threshold. Thus, the invention may be used to supply a positive signal where previously a negative one was present or alternatively, to supply a negative signal where previously a positive one was present.
15 Various combinations of compounds may be used on the same or different media to produce both positive and negative changes in signal upon re-reading.

- Light-sensitive compounds may be placed on the optical media in a number of ways. For example, a compound may be specifically placed in the optical path between a data set that has been recorded on the medium and the optical detector. It may be appropriate to place a
20 light-sensitive compound over a larger area of the media than is necessary to provide a signal change. As it may be preferable for the light-sensitive compound to be active only upon re-reading, extraneous placement of the compound may not interfere with the initial reading of the recorded data. Furthermore, the light-sensitive compound may be distributed on the media in an inactive form and specific areas containing the compound may be activated later in time. For
25 example, an inactive form of a delayed fluorescence compound may be spin coated across a portion of, or all of, the media. After the inactive form of the fluorescent compound has coated a portion of the media, it may be selectively activated at one or more locations to transform the compound into an active form.

- In one embodiment, specific areas of the fluorescent compound may be activated by
30 crosslinking. For some light-sensitive compounds, a laser may catalyze crosslinking of the inactive form of the light-sensitive compound and thus selectively transform it into an active

form. This technique may allow for localized compound activation and may provide for data alteration on a small scale, such as a single bit. This selective activation of various portions of the light-sensitive compound may be performed in a manner similar to that used to write data to a CD-R disk. In fact, the same device may be used to write data to a disk as well as to
5 selectively activate portions of the light-sensitive compound. This may be done, for example, by using a variable power writer, or alternatively, it may be done by placing the light-sensitive compound on the disk in a plane that provides a different focal point than that provided by the recording dye. In this latter method, the focal point of the writing laser may then be altered to either affect the recording dye or the light-sensitive compound. If the data track on a specific
10 medium is transferred to the medium by a physical means, for example, by injection molding, the activation wavelength of the light-sensitive compound may be chosen without regard to recording dyes.

In another embodiment, the light-sensitive compounds may be chosen from those having an excitation wavelength at or about the same wavelength used by a reader. For example, if a
15 CD reader uses a laser diode emitting light at a wavelength of about 770-830 nm, then the light-sensitive compound may be chosen from a group having excitation wavelengths in the same range. In another embodiment, the light-sensitive compound may be chosen from a group of compounds having excitation wavelengths at about 630-650 nm, a wavelength typically used in a DVD reader. In another embodiment, compounds may be chosen that possess dual excitation
20 wavelengths at both about 780 nm and about 530 nm. If such a dual wavelength compound is used, a single compound composition may be employed for use with media to be used with either a CD player or a DVD player. Such a compound composition may be either a mixture of different compounds or contain a single compound that exhibits multiple excitation wavelengths.

In another aspect, the compounds are chosen so that they emit at wavelengths that are the
25 same or close to the same as the wavelengths that are detected by the readers. For example, for use with a CD, the light-sensitive compound may emit at about 780 nm and for use with a DVD, the light-sensitive compound may emit at a wavelength of about 650 nm. The chosen security dies may exhibit long term stability under typical optical media storage conditions and the
30 compounds may be light fast and non-reactive. In addition, compounds may be chosen based on compatibility with the polymer or other material that is used to produce the optical media

substrate. Light-sensitive compounds may be chosen from those that exhibit stability for the expected lifetime of the optical media.

In one embodiment, the light-sensitive compounds are chosen from a group of dyes, specifically, cyanine dyes. These cyanine dyes include, among others, indodicarbocyanines (INCY), benzindodicarbocyanines (BINCY), and hybrids that include both an INCY and a BINCY. Hybrids may be, for example, mixtures of two different dyes or, in another embodiment, compounds that include both INCY and BINCY moieties. In one embodiment, the light-sensitive compound is a ratiometric compound having a linked structure with excitation ranges at both the CD and DVD ranges of about 530 and 780 nm. In a further embodiment, the dye is phosphorescent, having a time delay of about 10 milliseconds. Table 1 provides some of the dyes that may be useful with the invention.

Table 1

Dye Name/No.	CD/DVD	Excitation λ	Emission λ
Alcian Blue (Dye 73)	DVD	630 nm	Absorbs
Methyl Green (Dye 79)	DVD	630 nm	Absorbs
Methylene Blue (Dye 78)	DVD	661 nm	Absorbs
Indocyanine Green (Dye 77)	CD	775 nm	818nm
Copper Phthalocyanine (Dye 75)	CD	795 nm	Absorbs
IR 140 (Dye 53)	CD	823 nm (66 ps)	838nm
IR -768 Perchlorate (Dye 54)	CD	760 nm	786nm

	IR 780 Iodide	CD	780 nm	804nm
	(Dye 55)			
5	IR 780 Perchlorate	CD	780 nm	804nm
	(Dye 56)			
	IR 786 Iodide	CD	775 nm	797nm
	(Dye 57)			
10	IR 768 Perchlorate	CD	770 nm	796nm
	(Dye 58)			
	IR 792 Perchlorate	CD	792 nm	822nm
	(Dye 59)			
15	1,1'-dioctadecyl-3,3,3',3'- tetramethylindodicarbocyanine perchlorate (Dye 231)	DVD	645 nm	665 nm
20	1,1'-dioctadecyl-3,3,3',3'- tetramethylindo tricarbocyanine Iodide (Dye 232)	DVD	748 nm	780 nm
25	1,1',3,3,3',3'-hexamethyl indodicarbocyanine Iodide (Dye 233)	DVD	638 nm	658 nm
30	DTP (Dye 239)	CD	800 nm (33 ps)	848nm
	HITC Iodide (Dye 240)	CD	742 nm (1.2 ns)	774nm
35	IR P302 (Dye 242)	CD	740 nm	781 nm
40	DTTC Iodide (Dye 245)	CD	755nm	788nm

5	DOTC Iodide (Dye 246)	DVD	690nm	718nm
	IR-125 (Dye 247)	CD	790nm	813nm
	IR-144 (Dye 248)	CD	750nm	834nm

Light-sensitive compounds may be chosen from any compound or combination of compounds that serve to change the output signal from the medium upon re-reading. These compounds include delayed emission compounds, delayed absorbance compounds and other light sensitive compounds. For example, a layer in the medium that becomes reflective upon re-reading may also be useful in predictably altering the output of the medium.

Light-sensitive compounds may be placed on the optical media in various thicknesses dependent upon the application. For example, if a phosphorescent compound is applied by a spin coating process, it may be dissolved in ethyl lactate and the compound may overcoat the entire disk. The thickness of the compound layer may be controlled by varying, among other factors, the rotational speed of the media during this process. In one embodiment, the compound layer may be from 120 nm to less than 1 nm thick. The desired thickness of the compound layer that is applied may be a function of the absorption of the compound, the emission of the compound, the density of the compound and the structure of the media, as well as the properties of the reader that is used to read the data off of the media. In one embodiment, the compound may be applied at a thickness that is thin enough to allow transmission of light to adequately read the underlying data upon initial sampling while being dense enough to provide adequate fluorescence upon re-reading with the same reader.

A film thickness of from 50 to 160 nm has been found useful. It is preferred that the film thickness for a CD is in the range from about 70 nm to about 130 nm. While film thickness for a DVD is preferably in the range of from 50 nm to 160 nm, of course other suitable thicknesses may be employed.

In another embodiment, a 5 nm thick layer of a light-sensitive compound was spin coated onto a CD. At a laser diode wavelength of 780 nm, the absorption by the compound was about 61% and the delayed fluorescence of the compound was about 12%.

In addition to coating a light-sensitive compound onto the media, the compound may be spotted at specific locations on the media. Light-sensitive compound may be placed at any depth within or on the media and is preferably at a position in the media where the reader can adequately focus on the compound.

Figure 4 illustrates an embodiment of the invention using an optical medium similar to that described in figure 3. The digital output from the medium upon initial sampling is shown and is the same as the output from the medium illustrated in figure 3. The optical disk 200 shown in cross-section in figure 4 contains an additional light-sensitive compound layer 400 (not present in figure 3) which is distributed through the disk in a position that is close to reflective layer 240. Although the security layer 400 is shown disposed within the substrate 210, the present invention is not limited in this respect and the light-sensitive compound may be dispersed in any other suitable location. Light-sensitive compound 400 may be cross-linked, for example, by laser catalysis, at specific locations to provide a delayed fluorescence compound at the specific locations. Referring to figure 4, the location of activated compound is shown at locus 410. The data recorded on the disk, represented by a series of pits 220 and lands 230, is identical to that shown in figure 3. In operation, a focused light source used to read the optical disk passes through light-sensitive compound layer 400 and a portion of the light is instantaneously reflected back through light-sensitive compound layer 400 so that the data output upon an initial reading is identical to that shown in figure 3.

However, as is illustrated in figure 5, activated compound locus 410 is excited by the light and due to the compound's delayed fluorescence, emits light at a certain wavelength several milliseconds later, for example. Through instructions provided on the disk, the reader has been directed to re-read the same locus 410 on the disk shortly after its initial sampling. In one embodiment, as illustrated in figure 5, the reader re-reads locus 410 at about the time of the delayed fluorescence. The detector receives a different output than it does initially (as represented in figure 4) due to the light provided by the delayed fluorescence of activated light-sensitive compound locus 410. Light-sensitive compound locus 410 has been placed and activated to mask pit 270. Referring back to figure 3, showing a disk without light-sensitive

compound 400, as the track passes through the focused light beam, transitions representing 1's are detected at points A, B, C and D as the transition is made from pit to land or land to pit. The same response is received from the medium in the embodiment shown in figure 4, upon initial sampling. Referring now to figure 5, representing the response received upon re-reading, the light-sensitive compound at locus 410 is masking pit 270 and as the track passes through the light beam, a transition is still recognized at point A, but the transitions at points B and C are not detected because the emission of light from light-sensitive compound locus 410 blocks the transition and instead is read as a continuation of the land between points A and B. The signal generated across this span during re-reading does not cross threshold level, and the next transition to be detected is at point D. Thus, from points A to D the raw 14 bit data signal is read as 10010001001 prior to excitation of the light-sensitive compound at locus 410 (figure 4) and is read as 10000000001 upon re-reading when the light-sensitive compound at locus 410 has been excited by a previous pass of the laser (figure 5). The effective reflectance has been changed to simulate the removal of two transitions. In this manner, a different set of predictable data is read upon re-reading the same location that had been previously read by the same device. If the same location is re-read again after the compound emission has subsided, the initial reading of 10010001001 will be detected. The emission from the light-sensitive compound at locus 410 need not be as intense as that reflected back from a land but preferably is of adequate continuous intensity to prevent the signal from crossing the threshold.

Figure 6 illustrates an embodiment that uses a light absorbing compound to alter the data output from an optical medium. The data that has been recorded on disk 300 is identical to that shown in figures 4 and 5. Inactive light absorbing compound has been disposed in a layer 500 across a portion of disk 300. Locus 510 has been activated to make the light absorbing compound active at point F. Upon initially reading the disk, the reader detects data that is equivalent to that detected in figure 4, described above. Upon re-reading the data however, locus 510 has been excited by the previous pass of the laser, and, upon re-reading, absorbs light that is reflected off of land 530, and this light is therefore not detected. Whereas initially the data read from the track between points E and G was detected as 1000000001, upon re-reading the light absorbing compound has altered the data so that over the same section it reads 1001000001. Thus, the use of a light absorbing compound has added a transition where previously there was none.

By incorporating light-sensitive compounds having specific time delay in light emission and/or excitation and/or absorption at various wavelengths, with instructions to re-read specific areas on the media at time intervals based on the time delay, various copy prevention techniques may be formulated. Thus, any combination of sampling, re-reading and re-sampling of one or
5 more locations on the media may be used. In addition, any combination of light sensitive compounds may be used to further vary the copy protection techniques.

Having thus described certain embodiments of the present invention, various alterations, modifications and improvements will readily occur to those skilled in the art. Such alterations, modifications, and improvements are intended to be within the spirit and scope of the invention.
10 Accordingly, the foregoing description is by way of example only, and is not intended to be limiting. The invention is limited only as defined in the following claims and the equivalents thereof.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202

CLAIMS

What is claimed is:

- 5 1. A method of authenticating optical storage media comprising:
 reading a first set of data from a locus on an optical storage medium; and
 re-reading a second set of data from the locus, wherein the second set of data is
different from the first set of data.
- 10 2. The method of claim 1 wherein sampling the locus comprises sampling a data bit.
3. The method of claim 1 wherein sampling the locus comprises sampling a data
byte.
- 15 4. The method of claim 1 wherein sampling the locus comprises sampling a data
frame.
5. The method of claim 1 wherein sampling the locus comprises sampling a data
block.
- 20 6. The method of claim 1 wherein sampling the locus comprises sampling a data
sector.
7. The method of claim 1 further comprising re-reading a second locus.
- 25 8. The method of claim 1 wherein reading the first set of data produces a signal that
is inadequate to provide for an intended use of the data stored on the medium.
9. The method of claim 8 wherein detecting the second set of data produces a signal
30 that is adequate to provide for an intended use of the data stored on the medium.

10. The method of claim 1 wherein detecting the second set of data comprises reading at least a portion of a file allocation statement.

11. The method of claim 1 wherein re-reading the locus occurs within about one
5 second of sampling.

12. The method of claim 11 wherein re-reading the locus occurs within about ten milliseconds of sampling.

10 13. The method of claim 12 wherein re-reading the locus occurs within about one millisecond of sampling.

14. The method of claim 1 further comprising providing the optical storage medium with a light-sensitive compound.

15 15. The method of claim 14 wherein reading the second set of comprises reading a signal from the light-sensitive compound.

16. The method of claim 14 further comprising providing light-sensitive compound
20 in the optical path of the locus and an optical detector.

17. The method of claim 14 wherein the light-sensitive compound has an emission wavelength at a wavelength detectable by an optical reader.

25 18. The method of claim 14 wherein the light-sensitive compound absorbs light that, in the absence of the light-sensitive compound, would be detected by a reader.

19. The method of claim 17 wherein a light emission from the compound provides at least a portion of the second data set.

20. The method of claim 17 wherein the light-sensitive compound is excitable by light emitted by the optical reader.

21. The method of claim 14 wherein the light-sensitive compound has an emission wavelength from about 770 nm to about 830 nm.

22. The method of claim 21 wherein the light-sensitive compound has an emission wavelength of about 780 nm.

23. The method of claim 14 wherein the light-sensitive compound has an emission wavelength from about 630 nm to about 650 nm.

24. The method of claim 14 wherein the light-sensitive compound has an emission wavelength of about 530 nm.

25. The method of claim 14 wherein the light-sensitive compound has an emission wavelength in the near infrared range.

26. The method of claim 14 wherein the compound is luminescent.

27. The method of claim 14 wherein the compound is phosphorescent.

28. The method of claim 19 wherein the compound is excitable at a wavelength of about 780 nm or about 530 nm.

29. The method of claim 14 wherein the compound has an emission wavelength of about 780 nm, or about 530 nm, or both.

30. The method of claim 14 wherein the compound has an emission wavelength of about 530 nm.

31. The method of claim 14 wherein the compound has emission wavelengths of about 780 nm and about 530 nm.

32. The method of claim 1 wherein the optical recording medium is selected from the group consisting of CD, CD-Audio, CD-ROM, CD-G, CD-i, CD-MO, CD-R, CD-RW, DVD, DVD-5, DVD-9, DVD-10, DVD-18 and DVD-ROM.

33. The method of claim 1 wherein the optical recording medium is a CD.

34. The method of claim 1 wherein the optical recording medium is a CD-ROM.

35. The method of claim 1 wherein the optical recording medium is a DVD.

36. The method of claim 14 wherein the dye is a cyanine compound.

37. The method of claim 14 wherein the compound is selected from the group consisting of indodicarbocyanines, benzindodicarbocyanines and hybrids thereof.

38. The method of claim 14 wherein the compound is an indodicarbocyanine.

39. The method of claim 14 wherein the compound is an benzindodicarbocyanine.

40. The method of claim 14 wherein the compound is a hybrid of an indodicarbocyanine and a benzindodicarbocyanine.

~~41.~~ An optical disk comprising:
a substrate;
a data track disposed on the substrate; and
a light-sensitive compound disposed on at least a portion of the disk and cooperating with the data track to alter the data upon excitation with a suitable stimulus.

42. The disk of claim 41 wherein the data track is injection molded.

43. The disk of claim 41 wherein the data track is formed via a recording dye.

5 44. The disk of claim 41 wherein at least a portion of the light-sensitive compound is active.

46. The disk of claim 45 wherein at least a portion of the light-sensitive compound is phosphorescent.

10

47. The disk of claim 45 wherein at least a portion of the light-sensitive compound is fluorescent.

15 49. The disk of claim 41 wherein at least a portion of the light-sensitive compound is excitable by a light source emitting light at a wavelength between about 770 and about 830 nm.

50. The disk of claim 44 wherein at least a portion of the light-sensitive compound is excitable by a light source emitting light at a wavelength between about 630 and about 650 nm.

20

51. The disk of claim 41 wherein the light-sensitive compound is excitable by a light source emitting light at a wavelength between about 780 nm and by a light source emitting at about 530 nm.

25

52. The disk of claim 41 wherein at least a portion of the light-sensitive compound is adapted to emit at 780 nm.

53. The disk of claim 41 wherein at least a portion of the light-sensitive compound is adapted to emit at 530 nm.

30

54. The disk of claim 41 wherein at least a portion of the light-sensitive compound is adapted to emit at both about 780 nm and about 530 nm.

55. The disk of claim 41 wherein the light-sensitive compound comprises a cyanine compound.

5 56. The disk of claim 41 wherein the light-sensitive compound comprises indodicarbocyanines.

57. The disk of claim 41 wherein the light-sensitive compound is benzindodicarbocyanines.

10 58. The disk of claim 41 wherein the light-sensitive compound is a hybrid of indodicarbocyanines and benzindodicarbocyanines.

15 59. The disk of claim 41 wherein a portion of the light-sensitive compound is adapted to be selectively activated.

60. The disk of claim 59 wherein the light-sensitive compound is activated by crosslinking.

20 61. The disk of claim 59 wherein the light-sensitive compound is activated by laser catalysis.

62. The disk of claim 59 wherein the light-sensitive compound is activated to provide at least a portion of a file allocation statement upon re-reading.

25 63. The disk of claim 41 wherein the data track includes instructions to re-read a locus on the disk.

30 64. The disk of claim 63 wherein activated light-sensitive compound is disposed over at least a portion of the locus.

65. The disk of claim 64 wherein the activated light-sensitive compound is a delayed luminescent or phosphorescent dye.

66. The disk of claim 65 wherein the activated light-sensitive compound is
5 interpretable by a reader to provide a response different from that provided by the data track.

67. The disk of claim 63 wherein the data track includes instructions to discontinue reading the data track if the reading upon re-reading is identical to an initial reading.

10 68. The disk of claim 63 wherein the data track includes instructions to continue accessing the data on the disk if the data detected upon re-reading is different from the initially-read data.

15 70. The disk of claim 41 wherein the light-sensitive compound is less than about 120 nm in thickness.

71. The disk of claim 70 wherein the light-sensitive compound is less than about 10 nm in thickness.

20 72. The disk of claim 71 wherein the light-sensitive compound is less than about 1 nm in thickness.

25 69. The disk of claim 41 wherein the light-sensitive compound is disposed on the disk by spin coating.

30 ~~73.~~ A method of treating an optical storage medium comprising:
recording data on an optical storage medium;
applying a light-sensitive compound to the optical storage medium; and
selectively activating at least a portion of the light-sensitive compound.

74. The method of claim 73 wherein the light-sensitive compound is activated by crosslinking.

75. The method of claim 74 wherein the light-sensitive compound is crosslinked by laser activation.

~~76.~~ An optical recording medium comprising:
stored data; and
means for altering, upon re-reading, data read from a locus on the medium.

77. The optical recording medium of claim 76 wherein the data read from the locus on the medium is temporarily altered upon re-reading.

~~78.~~ An optical recording medium comprising a data track including readable data, wherein at least a portion of an output of the data track is predictably altered upon re-reading.

79. The recording medium of claim 78 wherein the output is temporarily altered upon re-reading.

80. The optical recording medium of claim 78 wherein the medium comprises a CD.

81. The optical recording medium of claim 78 wherein the medium comprises a DVD.

82. The optical recording medium of claim 78 further comprising a light sensitive light-sensitive compound.

~~83.~~ A method of authenticating an optical storage medium, the medium having a first plane including data and a second plane having a light-sensitive compound, the method comprising:
reading data from the first plane on an optical medium;

and

5 84. The method of claim 80 comprising instructing a reader to alter a focal length of
a laser.

ABSTRACT

A method and apparatus for preventing copying of data from optical storage media. A locus on optical storage medium is initially read to produce a signal and is then re-read by a reader to produce a second signal. The signal detected upon re-reading is different from the signal that is detected upon initial sampling.

www.secdatabase.com

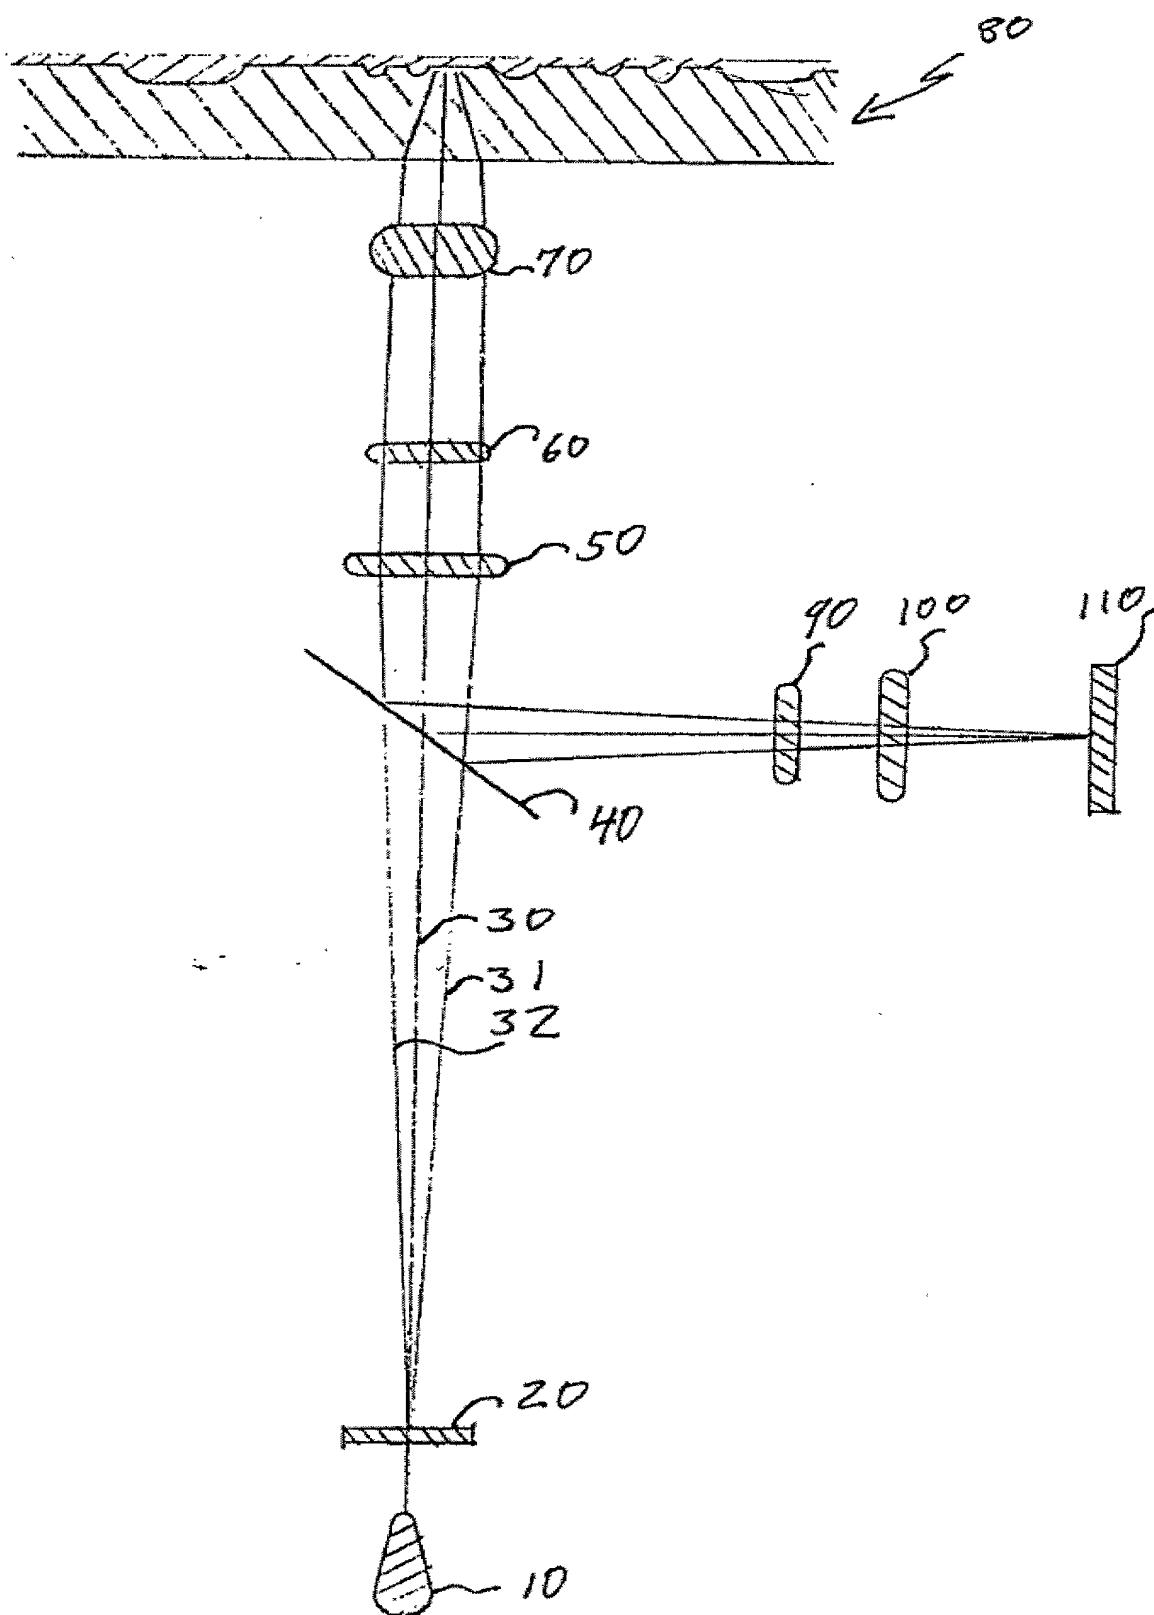


FIG. 1

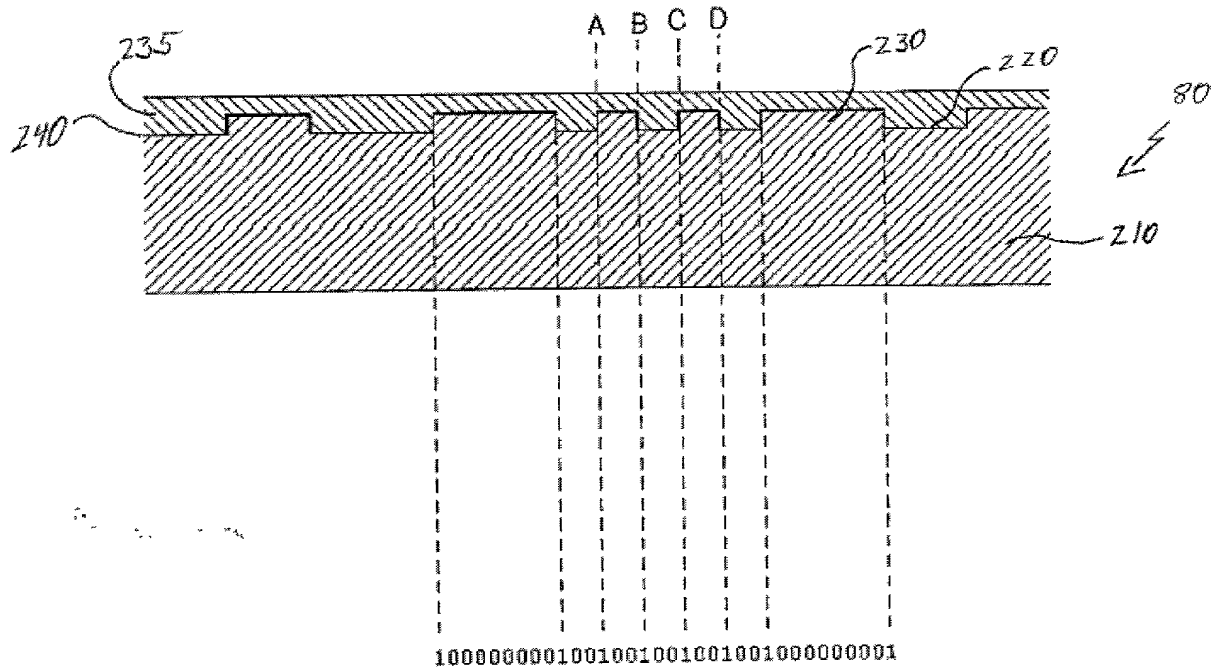


Fig. 3

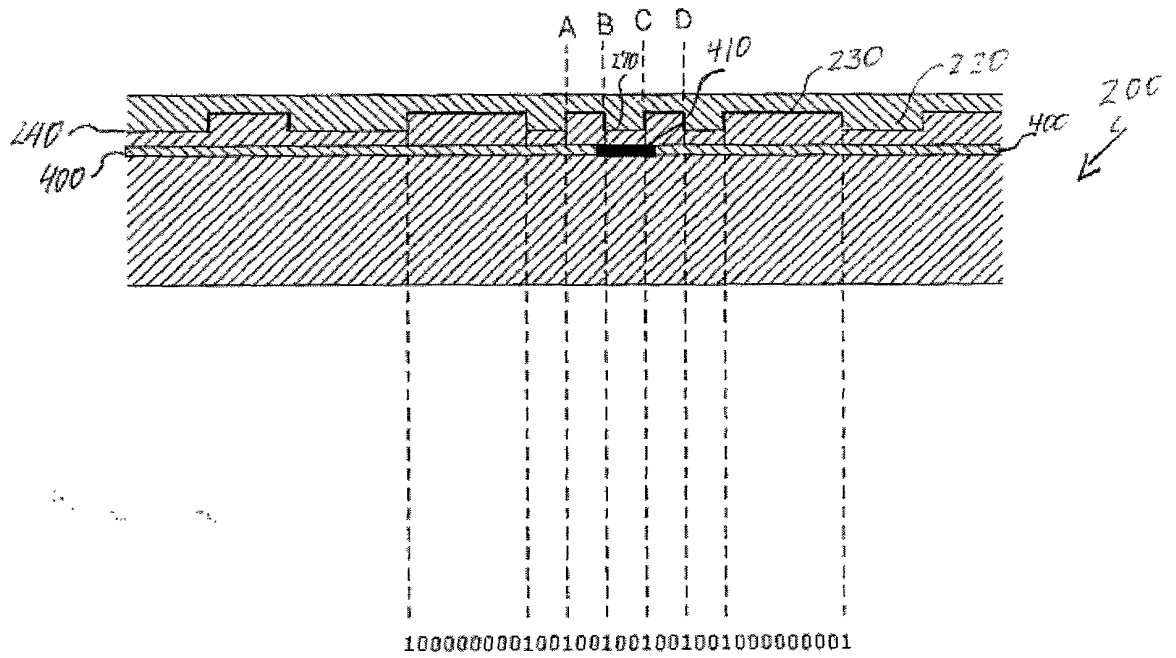


Fig. 4

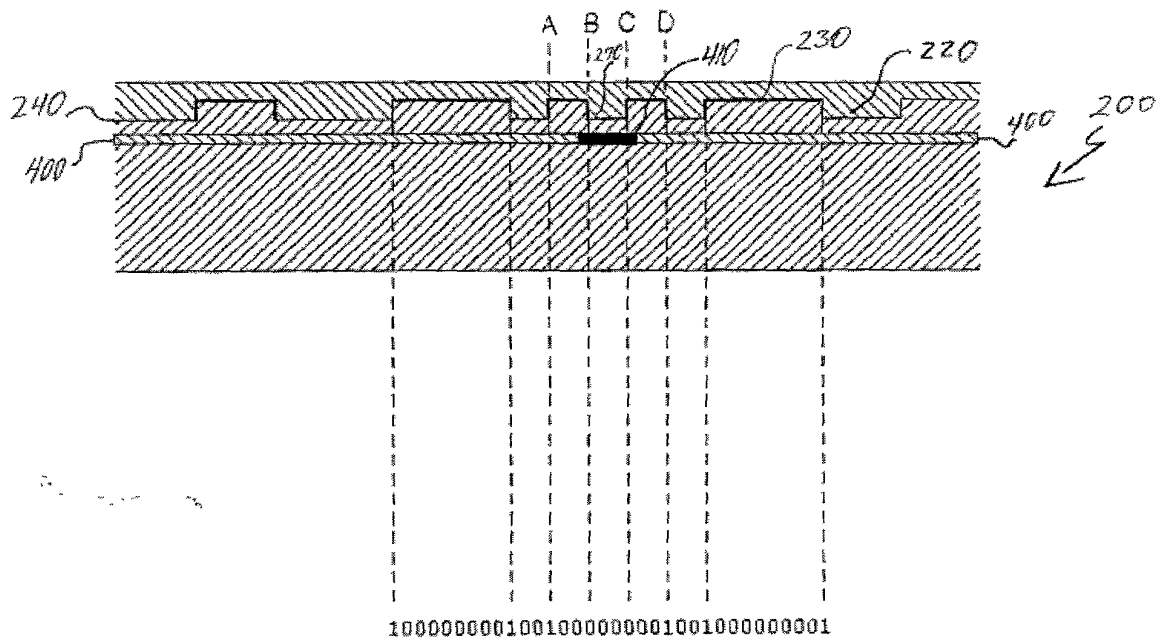


Fig. 5

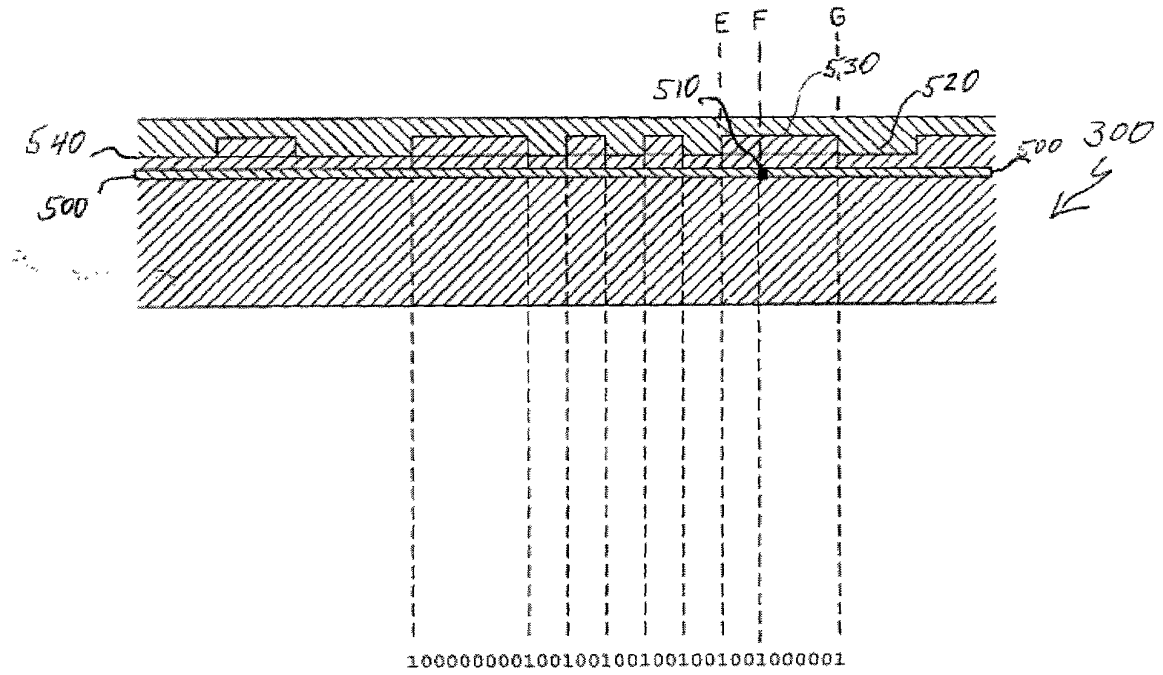


Fig. 6